

# ***Bike-Lift®***



DARE TO DREAM



**WORKSHOP EQUIPMENT**

**Bike-Lift®**



DARE TO DREAM



**WORKSHOP EQUIPMENT**

LIFTS

5

ACCESSORIES

13

WHEEL CLAMPS

17

REPAIR SHOP EQUIPMENT

19

TYRES & WHEELS

21

GAS EXTRACTION

27

PROFI LASER TOOLS

35







LIFTS



### CRUISER 750 GATE



#### VERSIONI DISPONIBILI

- **CG-002:** pompa ad aria
- **CG-003:** pompa elettroidraulica
- 10 posizioni di sicurezza
- Peso: 260 kg
- 



#### AVAILABLE VERSIONS


- **CG-002:** hydraulic air pump
- **CG-003:** electro-hydraulic pump
- 10 safety locking choices
- Weight: 260 kg



Gate 60x36cm



Split 39x75cm



Longer Ramp 84cm

### CRUISER 750 SPLIT



#### VERSIONI DISPONIBILI

- **CS-002:** pompa ad aria
- **CS-003:** pompa elettroidraulica
- 10 posizioni di sicurezza
- Peso: 260 kg



#### AVAILABLE VERSIONS

- **CS-002:** hydraulic air pump
- **CS-003:** electro-hydraulic pump
- 10 safety locking choices
- Weight: 260 kg





## MAX 500



Gate 60x36cm



Hand Control



Built-in electro-hydraulic pump



### VERSIONI DISPONIBILI

- **M-001:** pompa a pedale
- **M-002:** pompa ad aria
- **M-003:** pompa elettroidraulica
- 6 posizioni di sicurezza
- Peso: 220 kg



### AVAILABLE VERSIONS

- **M-001:** hydraulic foot pump
- **M-002:** hydraulic air pump
- **M-003:** electro-hydraulic pump
- 6 safety locking choices
- Weight: 220 kg



## MAX 500 GATE



### VERSIONI DISPONIBILI

- **MG-001:** pompa a pedale
- **MG-002:** pompa ad aria
- **MG-003:** pompa elettroidraulica
- 6 posizioni di sicurezza
- Peso: 220 kg



### AVAILABLE VERSIONS

- **MG-001:** hydraulic foot pump
- **MG-002:** hydraulic air pump
- **MG-003:** electro-hydraulic pump
- 6 safety locking choices
- Weight: 220 kg



## VERSIONI DISPONIBILI

- **SMG-002:** pompa ad aria
- **SMG-003:** pompa elettroidraulica
- 11 posizioni di sicurezza
- Peso: 240 kg



## AVAILABLE VERSIONS

- **SMG-002:** hydraulic air pump
- **SMG-003:** electro-hydraulic pump
- 11 safety locking choices
- Weight: 240 kg



COREX-HLP-D 32 HYDRAULIKOEL



## SUPER MAX 500 GATE



11 locking positions

DL-A01  
Centre plate for 3 wheel-vehiclesDL-A02  
Special lifting device

## DUO 1000




## VERSIONI DISPONIBILI

- **DL-003:** pompa elettroidraulica
- 12 posizioni di sicurezza
- Peso: 120 kg (per sollevatore)
- Trave distanziere: 55x10 cm




## AVAILABLE VERSIONS

- **DL-003:** electro-hydraulic pump
- 12 safety locking choices
- Weight: 120 kg (per lift)
- Spacer bar: 55x10 cm

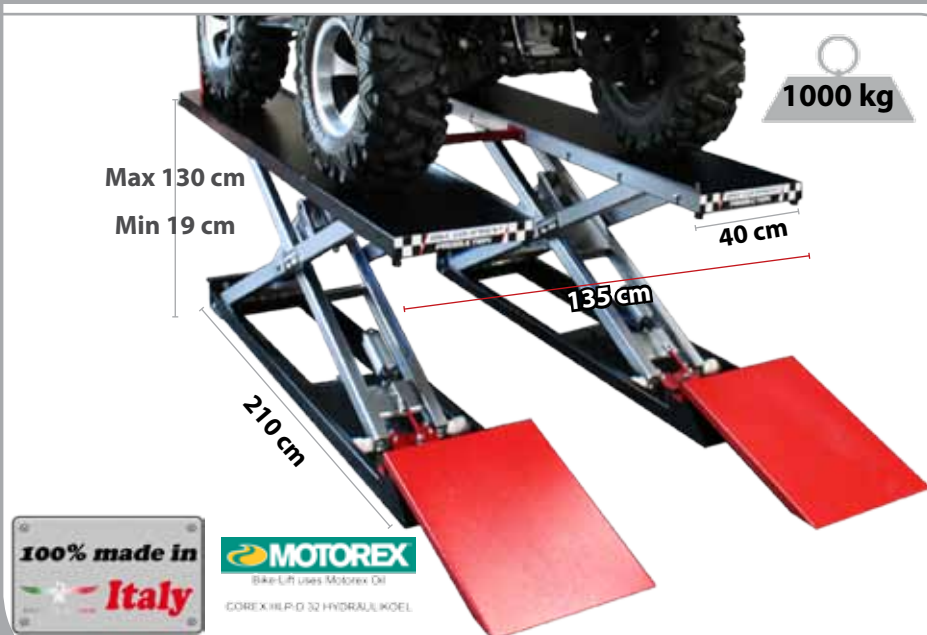

COREX-HLP-D 32 HYDRAULIKOEL




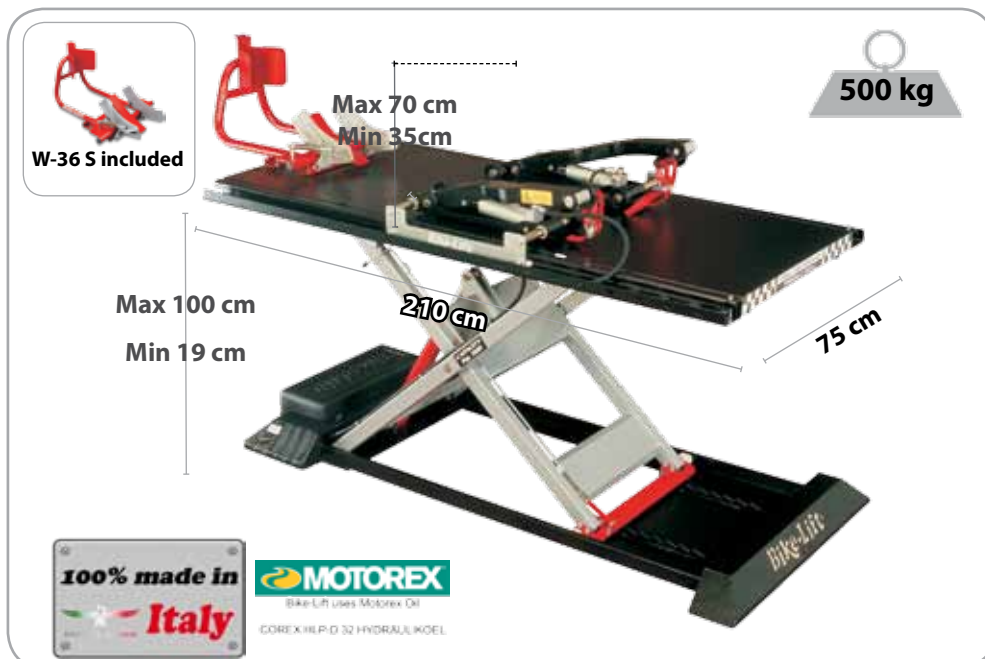

## MAX 500 TWIN ARMS



Switching device



Footpeg bracket



Rotating platform



### VERSIONI DISPONIBILI

- **MTA-002:** pompa ad aria
- **MTA-003:** pompa elettro-idraulica
- 6 posizioni di sicurezza
- Peso: 260 kg



### AVAILABLE VERSIONS

- **MTA-002:** hydraulic air pump
- **MTA-003:** electro-hydraulic pump
- 6 safety locking choices
- Weight: 260 kg

## KODIAK 500



### VERSIONI DISPONIBILI

- **KD-001:** pompa a pedale
- **KD-002:** pompa ad aria
- **KD-003:** pompa elettroidraulica
- 6 posizioni di sicurezza
- Peso: 110 kg



### AVAILABLE VERSIONS

- **KD-001:** hydraulic foot pump
- **KD-002:** hydraulic air pump
- **KD-003:** electro-hydraulic pump
- 6 safety locking choices
- Weight: 110 kg



## SPORT 500 GATE



## VERSIONI DISPONIBILI

- **SG-001:** pompa a pedale
- **SG-002:** pompa ad aria
- **SG-003:** pompa elettroidraulica
- 6 posizioni di sicurezza
- Peso: 190 kg



## AVAILABLE VERSIONS

- **SG-001:** hydraulic foot pump
- **SG-002:** hydraulic air pump
- **SG-003:** electro-hydraulic pump
- 6 safety locking choices
- Weight: 190 kg



Gate 60x36cm



Split 39x60cm



Air pump

## SPORT 500 SPLIT



## VERSIONI DISPONIBILI

- **SS-001:** pompa a pedale
- **SS-002:** pompa ad aria
- **SS-003:** pompa elettroidraulica
- 6 posizioni di sicurezza
- Peso: 190 kg




## AVAILABLE VERSIONS

- **SS-001:** hydraulic foot pump
- **SS-002:** hydraulic air pump
- **SS-003:** electro-hydraulic pump
- 6 safety locking choices
- Weight: 190 kg





## RACING 500

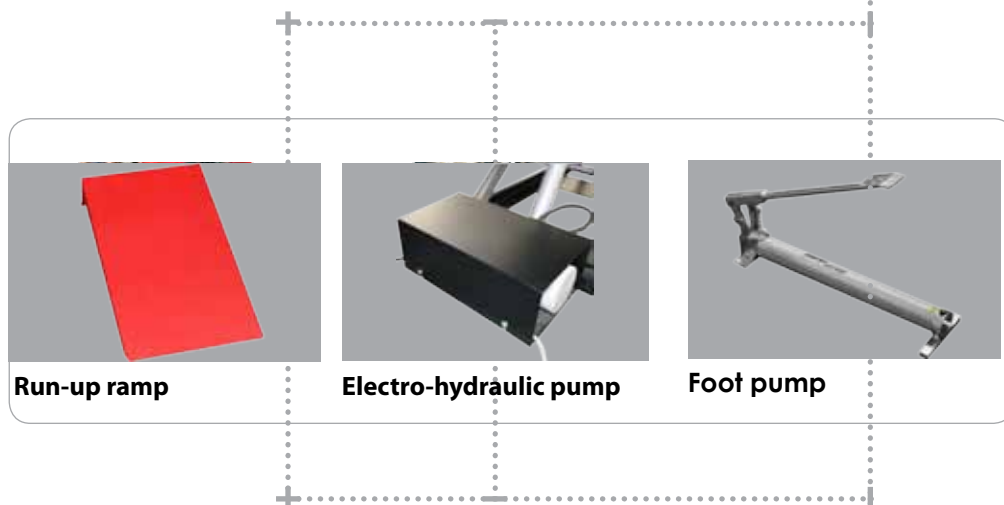

### VERSIONI DISPONIBILI

- **RN-001:** pompa a pedale
- **RN-002:** pompa ad aria
- **RN-003:** pompa elettroidraulica
- 6 posizioni di sicurezza
- Peso: 140 kg



### AVAILABLE VERSIONS

- **RN-001:** hydraulic foot pump
- **RN-002:** hydraulic air pump
- **RN-003:** electro-hydraulic pump
- 6 safety position choices
- Weight: 140 kg



## RACING 350



### VERSIONI DISPONIBILI

- **R-001:** pompa a pedale
- **R-002:** pompa ad aria
- **R-003:** pompa elettroidraulica
- 6 posizioni di sicurezza
- Peso: 140 kg



### AVAILABLE VERSIONS

- **R-001:** hydraulic foot pump
- **R-002:** hydraulic air pump
- **R-003:** electro-hydraulic pump
- 6 safety position choices
- Weight: 140 kg





### FROG 500




#### VERSIONI DISPONIBILI

- **F-002:** pompa ad aria
- **F-003:** pompa elettroidraulica
- 3 posizioni di sicurezza
- Peso: 285 kg




#### AVAILABLE VERSIONS

- **F-002:** hydraulic air pump
- **F-003:** electro-hydraulic pump
- 3 safety locking choices
- Weight: 285 kg

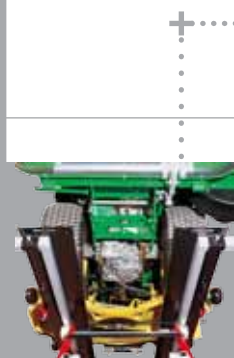

Rails



Adjustable rails



Double ramp



### GARDEN 750



#### VERSIONI DISPONIBILI

- **G-002:** pompa ad aria
- **G-003:** pompa elettroidraulica
- 10 posizioni di sicurezza
- Peso: 300 kg



#### AVAILABLE VERSIONS

- **G-002:** hydraulic air pump
- **G-003:** electro-hydraulic pump
- 10 safety locking choices
- Weight: 300 kg





# A

## CESSORIES



ITEM No. CB/L	CARGOBUCKLE® a fascia con cricchetto ed arrotolatore CARGOBUCKLE® retractable tie-down system with built-in ratchet
------------------	------------------------------------------------------------------------------------------------------------------------------



ITEM No. LC-001	Telecomando ad infrarossi per sollevatori elettrici Infrared control for electric lifts
--------------------	-----------------------------------------------------------------------------------------------



Adattatore in gomma vulcanizzata  
Vulcanized rubber adapter

ITEM No.	Spessore / Thickness mm
RA-20	20
RA-40	40
RA-60	60






ANTISKID RUBBER MAT  
RM



ANTISKID PLATFORM  
PZA-60



ANTI-FATIGUE MAT  
AFM-15

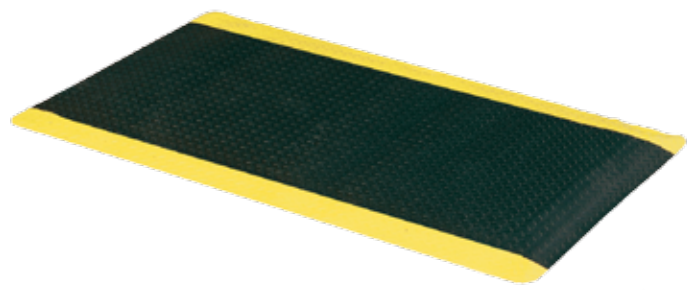

ANTISKID MAT  
ASM-580



Tappeto antiscivolo per rampe  
Antiskid mat for run-up ramps



SIDE EXTENSION WINGS



SW-500  
MAX 500 - MAX 500 GATE



SW-750  
CRUISER 750 GATE

DESCRIPTION	ITEM No.	DIMENSIONS cm
SIDE EXTENSION WINGS MAX 500 - MAX 500 GATE	SW-500	28x210
SIDE EXTENSION WINGS CRUISER 750 GATE	SW-750	28x220





# WHEEL CLAMPS



**W-36 S**

**MORSA AUTOMATICA**  
Apertura Max: 205mm  
Apertura Min: 70mm



**AUTOMATIC WHEEL CLAMP**  
Opening range Max: 205mm  
Opening range Min: 70mm

**W-38 S**

**MORSA AUTOMATICA**  
Apertura Max: 170mm  
Apertura Min: 60mm



**AUTOMATIC WHEEL CLAMP**  
Opening range Max: 170mm  
Opening range Min: 60mm

**W-32 N**

**MORSA PNEUMATICA**  
Apertura Max: 205mm  
Apertura Min: 55mm



**PNEUMATIC WHEEL CLAMP**  
Opening range Max: 205mm  
Opening range Min: 55mm

**W-34 N**

**MORSA MECCANICA**  
Apertura Max: 215mm  
Apertura Min: 70mm



**MECHANICAL WHEEL CLAMP**  
Opening range Max: 215mm  
Opening range Min: 70mm

**W-40**

**MORSA MECCANICA**  
Apertura Max: 225mm  
Apertura Min: 60mm



**MECHANICAL WHEEL CLAMP**  
Opening range Max: 225mm  
Opening range Min: 60mm

**W-30**

**MORSA MECCANICA**  
Apertura Max: 220mm  
Apertura Min: 70mm



**MECHANICAL WHEEL CLAMP**  
Opening range Max: 220mm  
Opening range Min: 70mm



# R EPAIR SHOP



## ENGINE STAND 06



ES-06



**ES-06/AS**  
Bike & scooter engine kit



**ES-06/DUC**  
Ducati engine kit



## SH.A.DIS. SHOCK ABSORBER DISASSEMBLER



SA-07



### STANDARD ADAPTERS

- ø 45mm
- ø 47mm
- ø 50mm
- ø 53mm
- ø 56mm
- ø 59mm
- ø 62mm
- ø 66mm
- ø 68mm
- ø 71mm
- ø 75mm
- ø 77mm
- ø 80mm
- ø 83mm
- ø 87mm







T

**YRES & WHEELS**

## TYRE CHANGER TCB-523

Smontagomme semi-automatica

Semi-automatic tyre changer

**TCB-523/230:** 230V version

**TCB-523/380:** 380V version



2 torrette in acciaio

2 demount-heads

Standard

**MC-4**  
5"-12"



**222418**  
13"-23"



Optional

**221618**

13"-23"



**ATCB**

**221618**

Torretta in plastica

Plastic demount-head

**ATCB**

Attacco in alluminio

Aluminium quick connection

## TYRE CHANGER TCM-523

Smontagomme semi-automatica

Semi-automatic tyre changer

**TCM-523/230:** 230V version

**TCM-523/380:** 380V version



**102766**

Torretta in plastica

Plastic demount-head

**ATCM**

Attacco in alluminio

Aluminium quick connection

**MC-4**

Torretta d'acciaio

Steel demount-head

Standard

**ATCM**



**102766**  
13"-23"

**MC-4**  
5"-12"



Optional

**222418**

13"-23"



**222418**

Torretta d'acciaio

Steel demount-head



Leva stallonatrice  
Bead Breaker



Pedale a doppio scatto,  
per facilitare il centraggio  
del cerchio.



Double release pedal to  
facilitate the rim centering.



Attacco rapido



Quick-change  
demount-head system



Griffe a 3 posizioni (ruote da 5" a 23")  
3-position rim clamps (wheels from 5" to 23")

## Ricambi / Spare parts

MC-4/P



MC-4/P  
Protezioni in plastica MC-4  
MC-4 plastic protection

220828



220828  
Protezioni plastica per 222418  
Plastic protection for 222418  
220628  
Protezioni plastica per 222418  
Plastic protection for 222418

220628


BB-P



Protezione leva stallonatrice  
Bead breaker Protection

RC-P 02

RC-P 01



Protezione griffe  
Rim-clamp protection

## Accessori Accessories



WR-27  
Rimuovi pesi in piombo  
Weight remover



TVT-1  
Smonta-valvola  
Valve-core screwdriver

TVT-RN

Monta-valvola  
Revolving nozzle






# TYRE BEAD BRAKER

Smontagomme manuale  
Manual tyre bead breaker


TBB/17/21



**239-040**  
Leva smontagomme  
Tyre lever  
L=360mm



**KA-7022**  
Leva smontagomme  
Tyre lever  
L=280mm



**KA-7023**  
Protezione cerchioni  
Rim protector

# WHEEL BALANCER

Bilanciatrice statica  
Static wheel balancer

B-35



# ELECTRONIC WHEEL BALANCER

Bilanciatrice statica elettronica

Electronic wheel balancer

B-35/E



## Adattatori Bilanciatrici / Balancer adapters




**B-A00**

Kit adattatori standard  
Standard adapter



**B-A01**

Kit adattatori monobraccio  
Adapter for single-sided swing-arm



**B-A02**

Kit adattatori BMW  
BMW adapter



**B-A03**

Kit adattatori maxi-scooter  
Maxi-scooters adapter



**B-A04**

Kit adattatori Piaggio X9  
Piaggio X9 adapter



**B-A05**

Kit adattatori BMW dal 2006  
BMW since 2006 adapter

# ELECTRONIC WHEEL BALANCER



BM-723



Standard  
adattatori - adapters



**BM-M**  
Kit adattatori monobraccio  
Adapter kit for single-sided swing-arm wheels



**BM-A**  
Kit adattatori auto  
Adapter kit for cars







# GAS EXTRACTION



Arrotolatori meccanici  
Spring recoil exhaust hose reels

ITEM No. AR-75/5D	L=5m Ø75mm - 1 COPRI FSC 75 - AFT 75
AR-75/7.5D	L=7,5m Ø75mm - 1 COPRI FSC 75 - AFT 75
ARC-100/5D	L=5m Ø100mm - 2 COPRI FSC 100 - AFT 100
ARC-100/7.5D	L=7,5m Ø100mm - 2 COPRI FSC 100 - AFT 100



Arrotolatori meccanici con aspiratore  
Spring recoil exhaust hose reels with extraction fan

ITEM No. ARA-75/7PB-SB	L=7m Ø75mm - 2 COPRI FSC 75 - AFT 75 230/400V ~3PH 50Hz 0,37Kw/0.5Hp
ARCA-100/7PB-SB	L=7m Ø100mm - 2 COPRI FSC 100 - AFT 100 230/400V ~3PH 50Hz 0,37Kw/0.5Hp



Arrotolatori motorizzati  
Motor driven exhaust hose reels

ITEM No. AMT-75/7.5D	L=7,5m Ø75mm - 2 COPRI FSC 75 - AFT 75
-------------------------	----------------------------------------



Arrotolatori motorizzati con aspiratore  
Motor driven exhaust hose reels with extraction fan

ITEM No. AMTA-75/7.5 SB	L=7,5m Ø75mm - 2 COPRI FSC 75 - AFT 75 230/400V ~3PH 50Hz 0,37Kw/0.5Hp
----------------------------	---------------------------------------------------------------------------



Elettro aspiratori  
Electrical extraction fan

ITEM No. AL-50/C	max 900m <sup>3</sup> /h - 230/400V ~3Ph 50Hz 0,37Kw/0.5Hp
AL-100/C	max 1700m <sup>3</sup> /h - 230/400V ~3Ph 50Hz 0,37Kw/0.5Hp
AL-150/C	max 2100m <sup>3</sup> /h - 230/400V ~3Ph 50Hz 0,37Kw/0.5Hp
AL-200/C	max 3000m <sup>3</sup> /h - 230/400V ~3Ph 50Hz 0,37Kw/0.5Hp


Bocchetta conica in gomma antigraffio attacco ø75mm  
Oval nozzle in non-scratch rubber ø hose 75mm

ITEM No.	Ø
BG-75/140	140mm
BG-75/200	200mm



Bivio ad "Y" completo di tubazione flessibile EUROGAS  
"Y-shaped" double nozzle complete with EUROGAS hose

ITEM No.	Ø
Y75-BGT-75/140	75mm - BGT-75/140
Y100-BGT-75/140	100mm - BGT-75/140

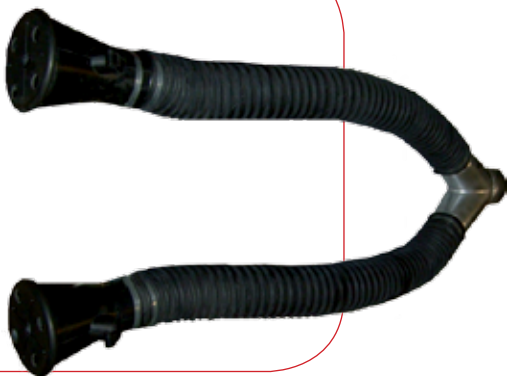


Bocchetta conica in gomma antigraffio attacco ø75mm  
Oval nozzle in non-scratch rubber ø hose 75mm

ITEM No.	Ø
BG-75/140	140mm
BG-75/200	200mm



Bocchetta conica in gomma antigraffio attacco ø75mm  
Oval nozzle in non-scratch rubber ø hose 75mm

ITEM No.	Ø
BG-75/140	140mm
BG-75/200	200mm

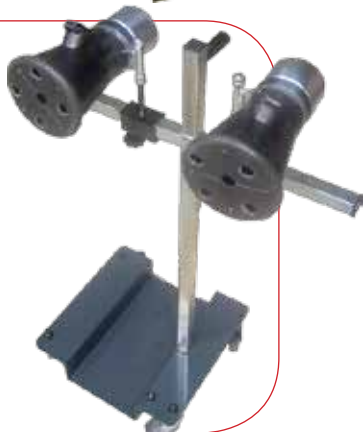

Bocchetta conica in gomma antigraffio attacco ø75mm  
Oval nozzle in non-scratch rubber ø hose 75mm

ITEM No.	Ø
BG-75/140	140mm
BG-75/200	200mm





ECOSYSTEM

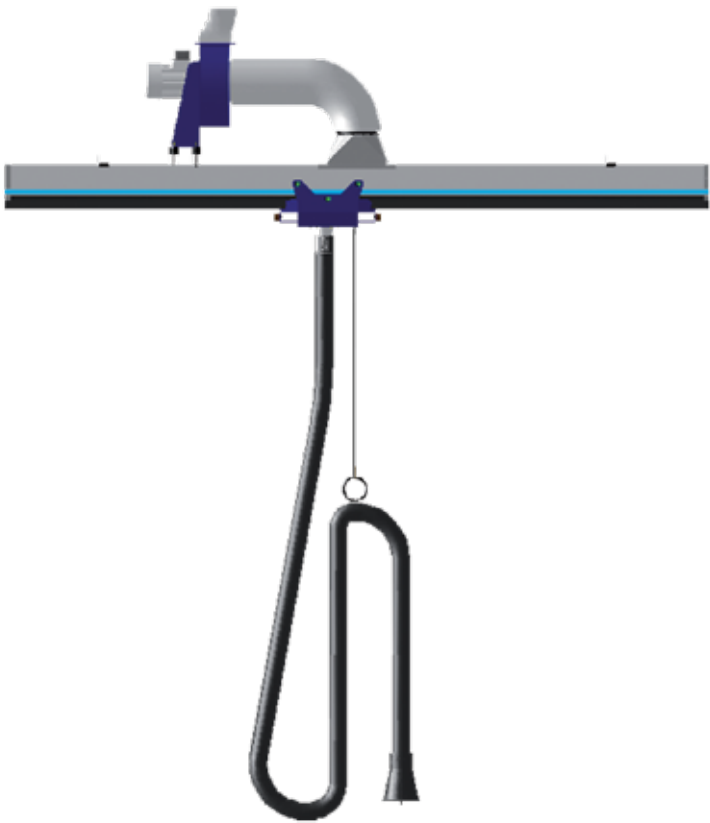


Photo: Harley-Davidson School - South Africa

ITEM No.	HOSE	TRACK	TROLLEY	EXTRACTION FAN	OUT
ECOSYS-A-06/1	ø 75mm L=7,5m	6m	1	1Hp-0,75Kw - 230/400V - 50Hz	180-R
ECOSYS-A-06/2	ø 75mm L=7,5m	6m	2	1,5Hp-0,75Kw - 230/400V - 50Hz	180-R
ECOSYS-A-09/1	ø 75mm L=7,5m	9m	1	1Hp-0,75Kw - 230/400V - 50Hz	180-R
ECOSYS-A-09/2	ø 75mm L=7,5m	9m	2	1,5Hp-0,75Kw - 230/400V - 50Hz	180-R
ECOSYS-A-12/1	ø 75mm L=7,5m	12m	1	1Hp-0,75Kw - 230/400V - 50Hz	180-R
ECOSYS-A-12/2	ø 75mm L=7,5m	12m	2	1,5Hp-0,75Kw - 230/400V - 50Hz	180-R
ECOSYS-A-15/1	ø 75mm L=7,5m	15m	1	1Hp-0,75Kw - 230/400V - 50Hz	180-R
ECOSYS-A-15/2	ø 75mm L=7,5m	15m	2	1,5Hp-0,75Kw - 230/400V - 50Hz	180-R
ECOSYS-A-18/1	ø 75mm L=7,5m	18m	1	1Hp-0,75Kw - 230/400V - 50Hz	180-R
ECOSYS-A-18/2	ø 75mm L=7,5m	18m	2	1,5Hp-0,75Kw - 230/400V - 50Hz	180-R
ECOSYS-A-21/1	ø 75mm L=7,5m	21m	1	1Hp-0,75Kw - 230/400V - 50Hz	180-R
ECOSYS-A-21/2	ø 75mm L=7,5m	21m	2	1,5Hp-0,75Kw - 230/400V - 50Hz	180-R



Tubo con anima in acciaio antischiacciamento

**Crushproof steel reinforced hose**

**EUROGAS-75/7,5: Ø75mm**

**EUROGAS-100/7,5: Ø100mm**



Giunto di pressione in PVC per tubi EUROGAS

**PVC pressure joint for EUROGAS hoses**

**ATR/75: Ø75mm**

**ATR/100: Ø100mm**



Giunto per bocchetta e tubi EUROGAS

**Connection joint for nozzle and EUROGAS hoses**

**ATR/B-75: Ø75mm**

**ATR/B-100: Ø100mm**



Supporto tubi da parete

**Wall-mounted hose support**

**SM-20**



**CSETK-75/7-COMP**

Carrello con EUROGAS75/7,5; CSZR-CAR; BGT-75/140  
**Trolley with EUROGAS75/7,5; CSZR-CAR; BGT-75/140**

**BL-A**

Bilanciere universale con fune nautica per sostegno tubo flessibile

**Universal balance block with nautical cord for suspended flexible hose**

**BLS-EKT-SUP**

Supporto per bilanciere universale BL-A per CSETK

**Support for BL-A universal balance block for CSETK**



**QE-AC1T/1.5HP**

Quadro elettrico per aspiratore centralizzato, completo di ricevitore e telecomando 2 canali

**Electrical control panel centralised extraction fan, complete with 2-channel receiver and remote control.**

400V - 1.5Hp - 1.1Kw



**ALLUFLEX**

Tubo flessibile in alluminio senza saldature. Incombustibile ed estendibile fino a 3 mt. Max 300°

**Non-welded flexible aluminium hose, extend to 3 mt. Max 300°**

ALLUFLEX-120: Ø120mm

ALLUFLEX-150: Ø150mm

# ARGON & ECOARGON

ARGON-1



ECOARGON-1



ARGON-2



ECOARGON-2




Sistemi completi di aspirazione gas di scarico composti da: aspiratore, tubo, bocchetta in gomma e gancio di supporto al muro.

Complete exhaust gas extraction system comprising: extraction fan, hose, rubber nozzle and wall-mounted support.

ITEM No.	EUROGAS-75	BGT-75/140	ECOARGON/SM	EXTRACTION FAN	OUT
ARGON-1-75-5	1 L=5m	1	1	0.5Hp - 230/400V - 3Phase	150-R
ARGON-2-75-5	2 L=5m	2	2	0.5Hp - 230/400V - 3Phase	150-R
ARGON-1-75-7	1 L=7,5m	1	1	0.5Hp - 230/400V - 3Phase	150-R
ARGON-2-75-7	2 L=7,5m	2	2	0.5Hp - 230/400V - 3Phase	150-R
ECOARG-1-75/5	1 L=5m	1	1	0.5Hp - 230/400V - 3Phase	75-L
ECOARG-1-75/5	2 L=5m	2	2	0.5Hp - 230/400V - 3Phase	75-L
ECOARG-1-75/7,5	1 L=7,5m	1	1	0.5Hp - 230/400V - 3Phase	75-L
ECOARG-2-75/7,5	2 L=7,5m	2	2	0.5Hp - 230/400V - 3Phase	75-L



ITEM No. TROTTER-50	<p>Aspiratore mobile per estrazione gas di scarico dalla zona di lavoro</p> <p>Mobile fan for the exhaust gas extraction from the working area.</p> <p>1000m<sup>3</sup>h - Max pres. 105mm H<sub>2</sub>O - 400V- 3Ph - 50Hz - 0,37Kw - 0.5Hp - out ø100L</p>
------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

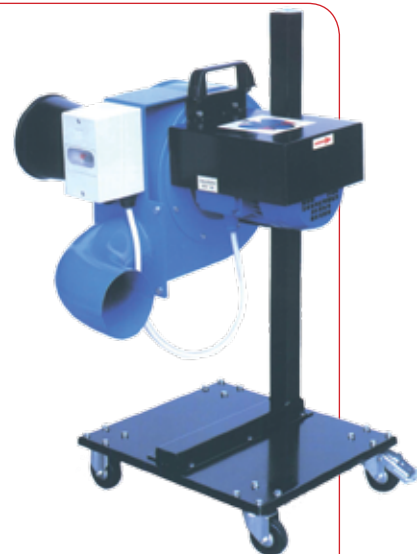


ITEM No. TROTTER-100S	<p>Aspiratore mobile completo di ugello regolabile in altezza ed inclinazione. Ideale per test di potenza.</p> <p>Mobile extraction fan adjustable in height and inclination. Ideal for power tests.</p> <p>1000m<sup>3</sup>h - Max pres. 105mm H<sub>2</sub>O - 400V- 3Ph - 50Hz - 0,37Kw - 0.5Hp - out ø100L</p>
--------------------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------




Photo: Harley-Davidson School - South Africa

# CHIMNEY KIT



KIT CAMINO 1  
CHIMNEY KIT 1

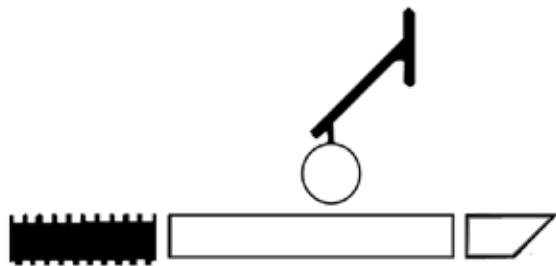

KIT CAMINO 2  
CHIMNEY KIT 2

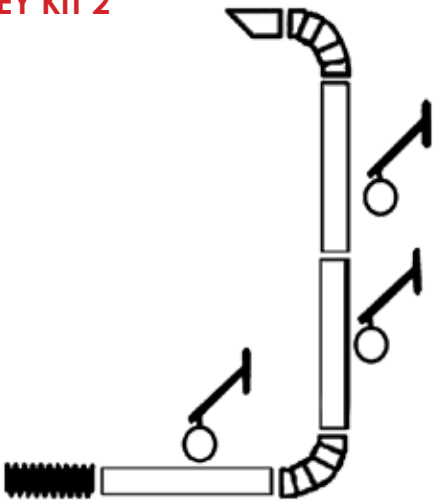

KIT CAMINO 3  
CHIMNEY KIT 3

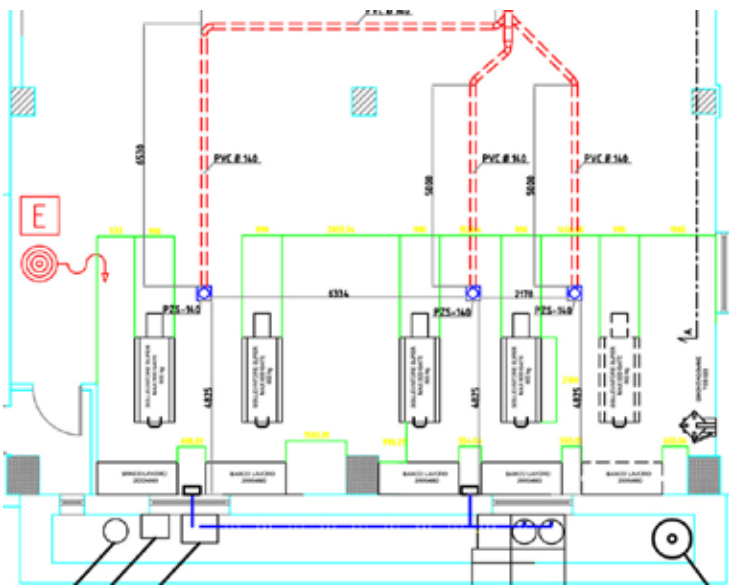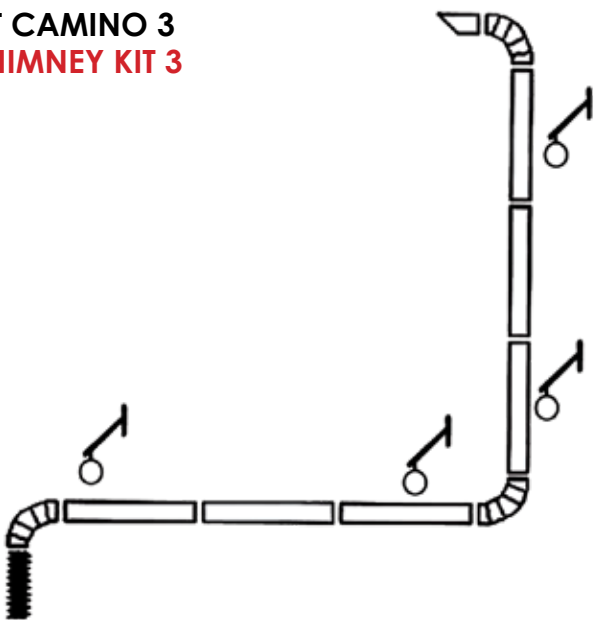

Esempio di progettazione di un'officina Bike-Lift con impianto aspirazione gas di scarico.  
Example of a Bike-Lift workshop planning with exhaust gas extraction system.

ITEM No.	HOSE	ALLUFLEX	FSC	CL	ST-CL	TEG	CR	work with
CAMINO-01-150	1 TU-150-1.5	Ø150	2 FSC-150	1 CL-150	1 Ø150	1 TEG-150	-	extraction fan 0.5Hp
CAMINO-01-180	1 TU-180-1.5	Ø180	2 FSC-180	1 CL-180	1 Ø180	1 TEG-180	-	extraction fans 1-1.5Hp
CAMINO-01-200	1 TU-200-1.5	Ø200	2 FSC-200	1 CL-200	1 Ø200	1 TEG-200	-	extraction fans 2-3Hp
CAMINO-02-150	3 TU-150-1.5	Ø150	2 FSC-150	5 CL-150	3 Ø150	1 TEG-150	2 CR-150-90	extraction fan 0.5Hp
CAMINO-02-180	3 TU-180-1.5	Ø180	2 FSC-180	5 CL-180	3 Ø180	1 TEG-180	2 CR-180-90	extraction fans 1-1.5Hp
CAMINO-02-200	3 TU-200-1.5	Ø200	2 FSC-200	5 CL-200	3 Ø200	1 TEG-200	2 CR-200-90	extraction fans 2-3Hp
CAMINO-03-150	6 TU-150-1.5	Ø150	2 FSC-150	9 CL-150	6 Ø150	1 TEG-150	2 CR-150-90	extraction fan 0.5Hp
CAMINO-03-180	6 TU-180-1.5	Ø180	2 FSC-180	9 CL-180	6 Ø180	1 TEG-180	2 CR-180-90	extraction fans 1-1.5Hp
CAMINO-03-200	6 TU-200-1.5	Ø200	2 FSC-200	9 CL-200	6 Ø200	1 TEG-200	2 CR-200-90	extraction fans 2-3Hp





# P ROFI LASERTOOLS



# PROFI B A T

**LASER**  
BIKE ALIGNMENT TOOL

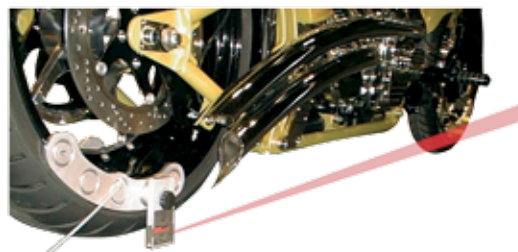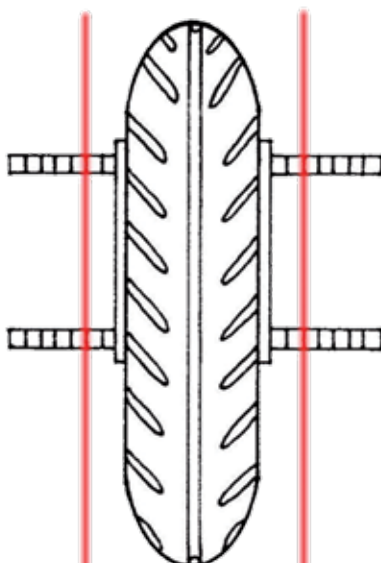


# PROFI S-BAT

**LASER**  
SPORTBIKE ALIGNMENT TOOL





# PROFI Q A T

**LASER**  
QUAD ALIGNMENT TOOL

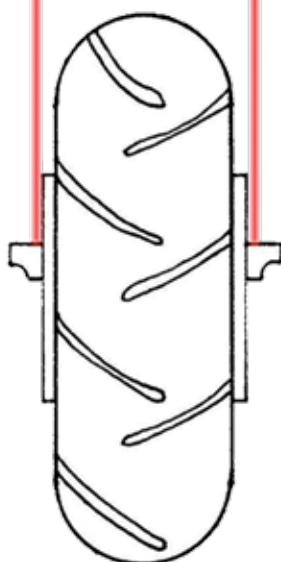

# PROFI C A T


**LASER**  
CHAIN ALIGNMENT TOOL

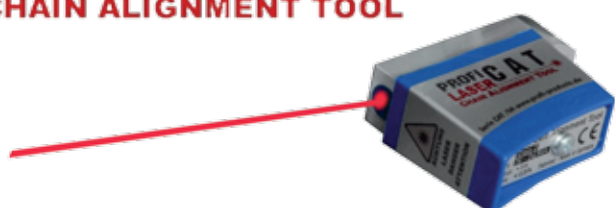





Esempio di progettazione di un'officina Bike-Lift.  
 Example of a Bike-Lift workshop planning.

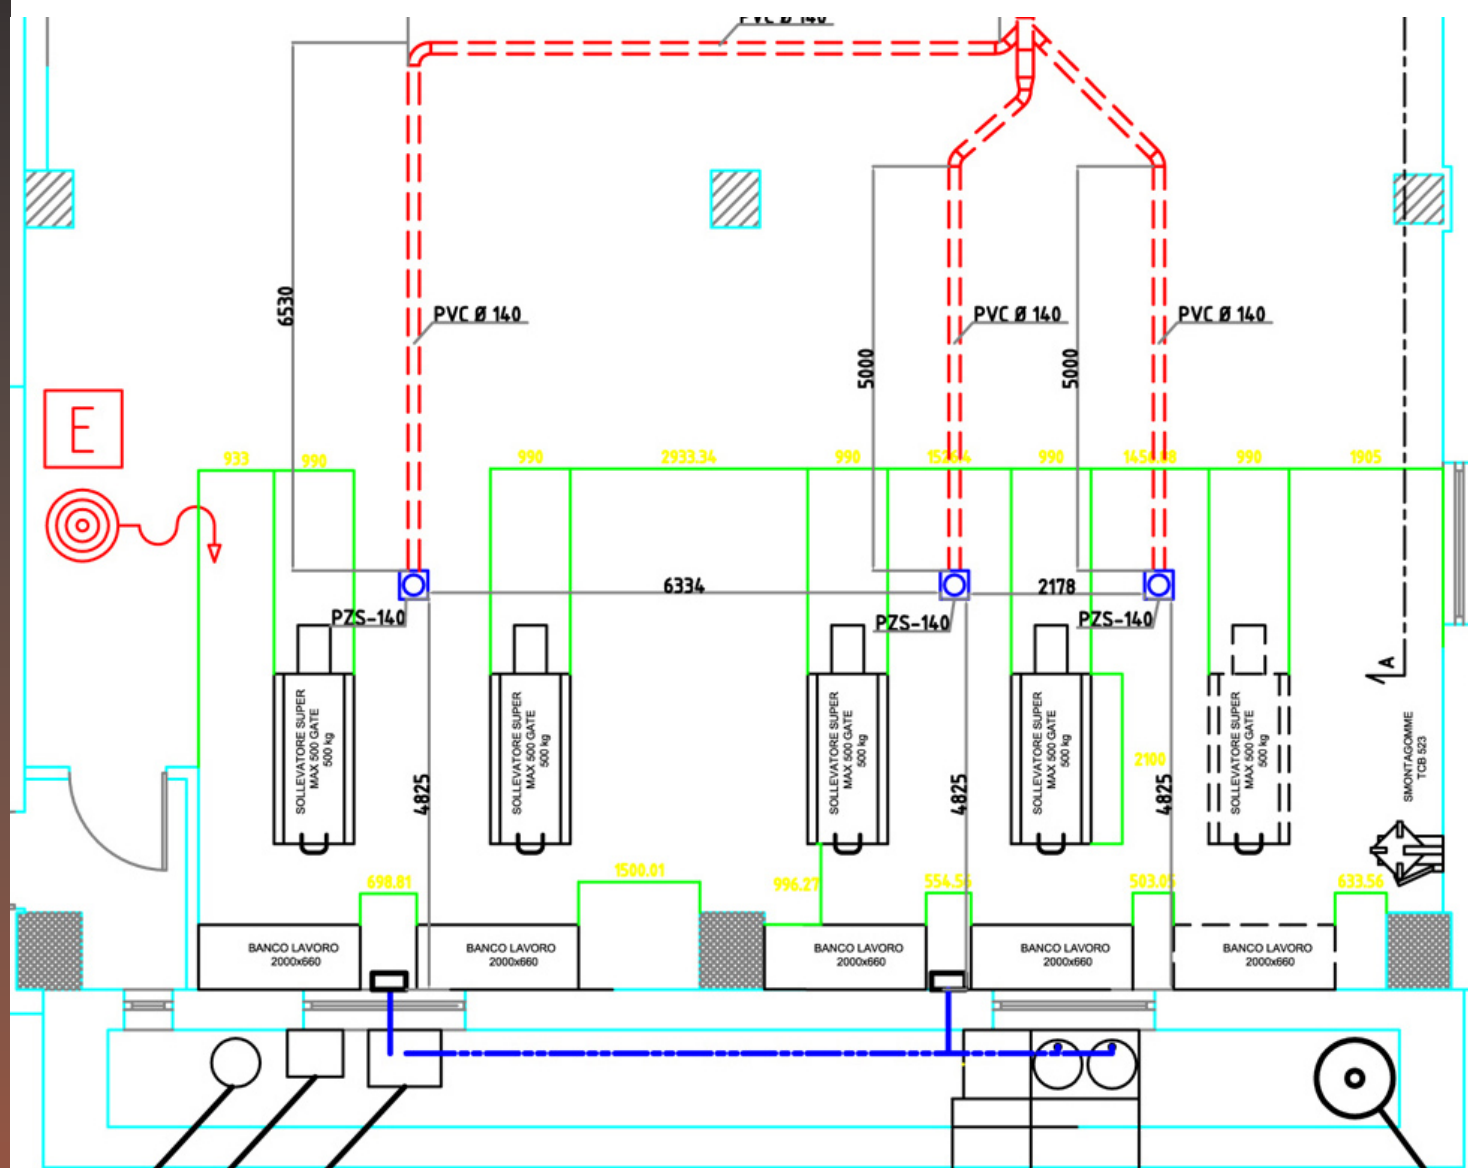

Le immagini a colori sono puramente indicative e possono non corrispondere alle tonalità dei prodotti. I disegni sono indicativi alle informazioni ed illustrano l'impiego dei prodotti. Bike-Lift s.r.l. si riserva la possibilità di cambiare, modificare od eliminare prodotti da questo catalogo senza preavviso.

The colour pictures are purely indicative and may not match to the exact product tonality. Bike-Lift srl reserves the right to change, modify or eliminate products in this catalogue without notice.



## MODULO RICHIESTA D'OFFERTA OFFER REQUEST FORM

Compila il seguente modulo per richiedere la progettazione e l'offerta per la tua officina.  
Fill in the following form to ask for the planning and offer for your workshop

Azienda / Company: \_\_\_\_\_

Indirizzo / Address: \_\_\_\_\_

Persona da contattare / Contact person: \_\_\_\_\_

Telefono / Phone: \_\_\_\_\_ Email: \_\_\_\_\_

### Composizione dell'officina / Workshop composition

Numero di sollevatori / Number of lifts: \_\_\_\_\_

Numero banchi di lavoro / Number of workbenches: \_\_\_\_\_

Impianto di aspirazione gas di scarico: ☐ YES ☐ NO

Gas extraction system

- Tipologia / Typology: ☐ arrotolatori / exhaust hose reels  
☐ binari a soffitto / sliding tracks  
☐ impianto fisso a muro / wall-mounted extraction kit  
☐ impianto sotto-pavimento / underfloor extraction system

Reparto pneumatici (smontagomme, bilanciatrice): ☐ YES ☐ NO

Tire section (tire changer, static wheel balancer)

Impianto distribuzione olio: ☐ YES ☐ NO

Oil distribution system

Impianto aria compressa: ☐ YES ☐ NO

Compressed air system

Kit utensili base per ciascuna postazione: ☐ YES ☐ NO

Basic tool kit for each working station

Kit cavalletti: ☐ YES ☐ NO

Paddock stand kit

Tipo officina:

Workshop typology

concessionario monomarca \_\_\_\_\_

monobrand dealer

concessionario plurimarca \_\_\_\_\_

multibrand dealer

officina generica \_\_\_\_\_

general workshop

Si prega di allegare sempre la piantina e fotografie del locale da allestire.

Please don't forget to enclose the plan and pictures of the workshop to be equipped.

**Fax: +39.0521.827044 - Email: info@bikelift.it**



Bike-Lift s.r.l. - Via Don Milani, 16 - 43012 - Sanguinaro di Fontanellato - PR - Italy  
Phone: +39.0521.827097 - Fax: +39.0521.827044 - [info@bikelift.net](mailto:info@bikelift.net) - [www.bikelift.net](http://www.bikelift.net)